

Product information

A-U1-2

Switching Head A-U1-2

For device NW1




- I M1 Ex ia I
- II 1G Ex ia IIC T4
- II 1D Ex iaD 20 T135


Characteristics

Intrinsically safe switching unit with reed switch and ATEX approval, for the NW1 range of devices, for use in intrinsically safe power circuits.

Technical data

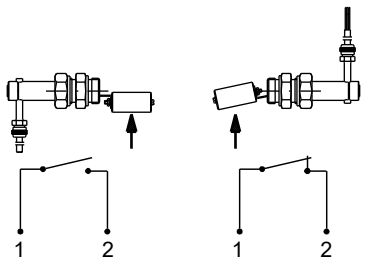Switch	reed switch
Medium temperature	-20...+110 °C
Ambient temperature	-20...+50 °C
Weight	0.05 kg additionally
Wiring	normally opened (n.o.) or normally closed (n.c.), no. 0.442
	
Switching voltage	max. 30 V
Switching current	max. 1 A
Switch performance	max. 50 W
Protection class	3
Ingress protection	IP 65
Electrical connection	cable 2.5 m, other cable lengths up to max. 5 m are optionally available

Dimensions

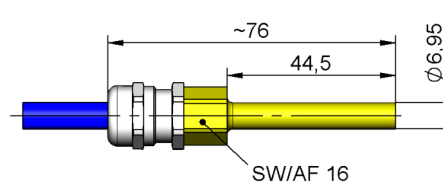

Handling and operation

- For use only in intrinsically safe power circuits - Provide a suitable isolating amplifier.
- Cable lengths max. 5 m.
- It must be ensured that the values given for voltage, current, and power are not exceeded.
- When switched on, a load must be connected in series.
- The electrical details apply to ohmic loads. Capacitive, inductive and lamp loads must be operated using a protective circuit.

Ordering code

The base device is ordered e.g. NW1-020HMA with switching head A-U1-2.

A-U1 - ^{1.} 2

1. Device series	
2	For NW1